

Automation for residential sliding gates up to 900 Kg



Control board positioned in a lifted position at the front. Always accesible and perfect for small or narrow spaces



Battery kit with dedicated support (optional and only for 24V models)

Dedicated support for bluetooth device NET-NODE



Models available with **magnetic limit switches**

Invisible fixing system, with threaded rod

Compatible with **external unlocking device by cable** (art. 450N to be used with BLINDOS - optional)

NETLINK OPERATOR

This operator is compatible with the NETLINK System and can be programmed with DEAINstaller and NETBOX

(Only versions with NET24N, NET230N, or NET724N)





Compatible with the Apps




KIT

230V ~ operators with control board, limit switches and encoder



						Features
LoLux 230V		900 kg		NET230N	✓	<ul style="list-style-type: none"> Irreversible with limit switches (magnetic only for LoLux 24V model) Speed adjustment and slow down in opening and closing Motor control by encoder and obstacle detection Anti-crushing safety device
LoLux 24V		800 kg		NET24N		

DIMENSIONS

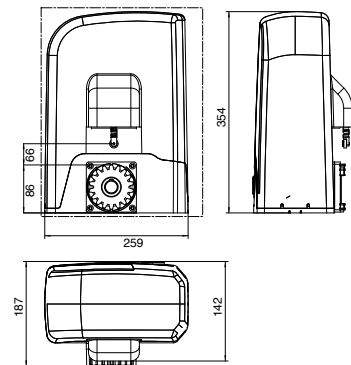

TECHNICAL INFO	@@I'&\$J	@@I'&J
Motor power supply (V)	230V ~ ±10% (50/60 Hz)	24V ~
Maximum power absorption (W)	450	110
Max thrust (N)	490	260
Duty cycle (cycles/h)*	11	18
N. max. cycles in 24h*	40	40
Built-in capacitor (µF)	125	\
Operating temperature (°C)	-20 ÷ 50	
Motor thermal protection (°C)	160	\
Speed (m/min)	10	10
Standard pinion	Z16	Z16
Weight with packing (Kg)	125	
Sound pressure (dBA)	< 70	
Protection level	IPX4 (IP44 for versions with magnetic limit switches)	

* For a 5m leaf length

