





NETLINK

by **DEA**

Downee

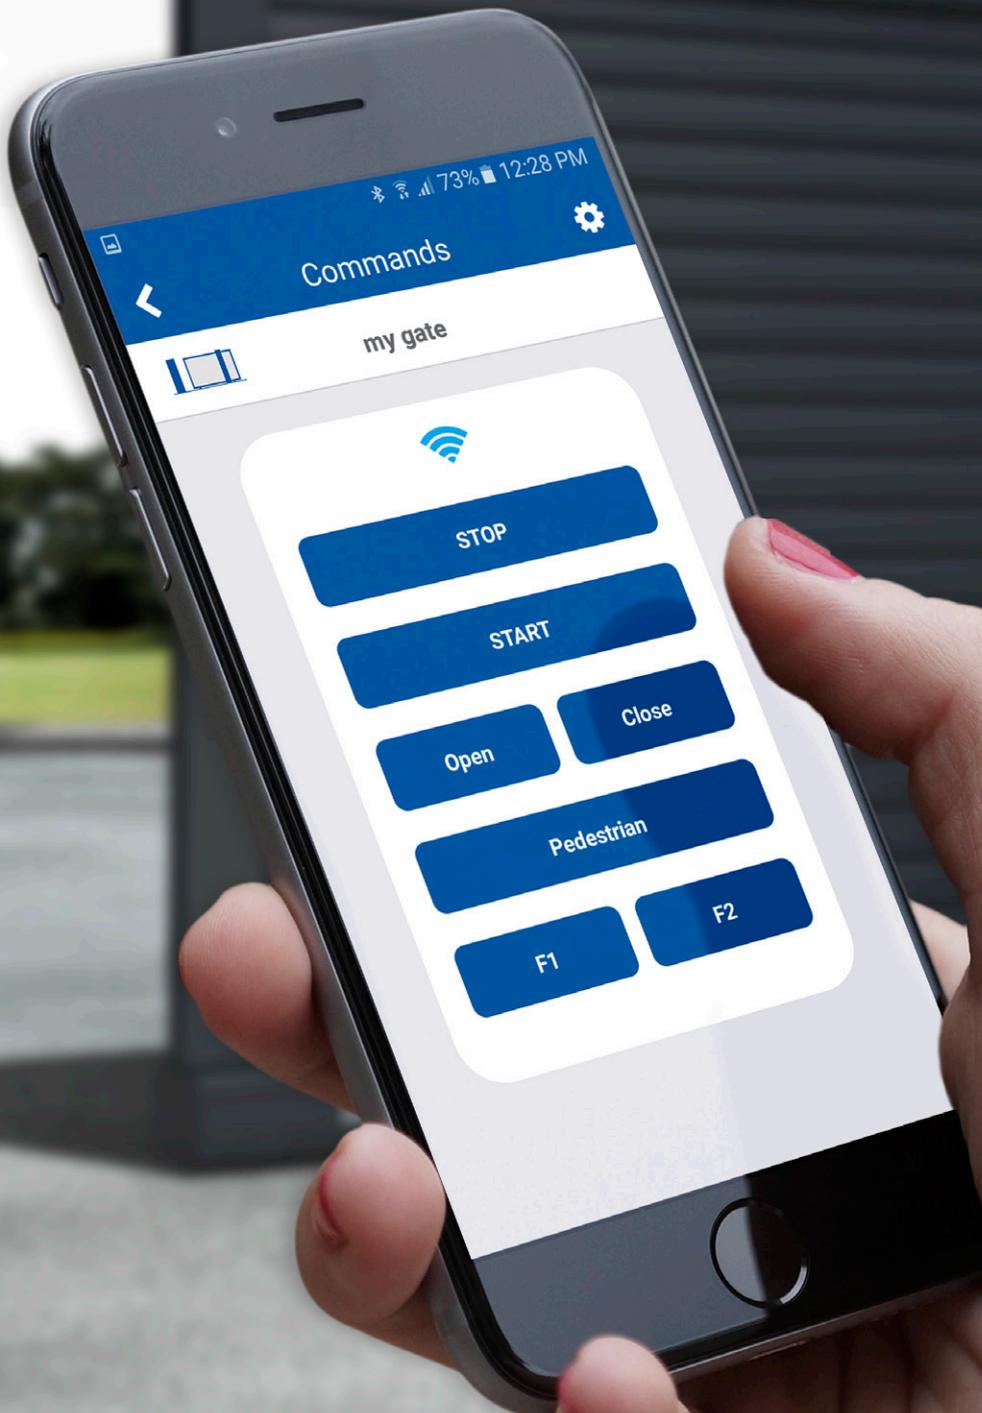

DEAinstaller App

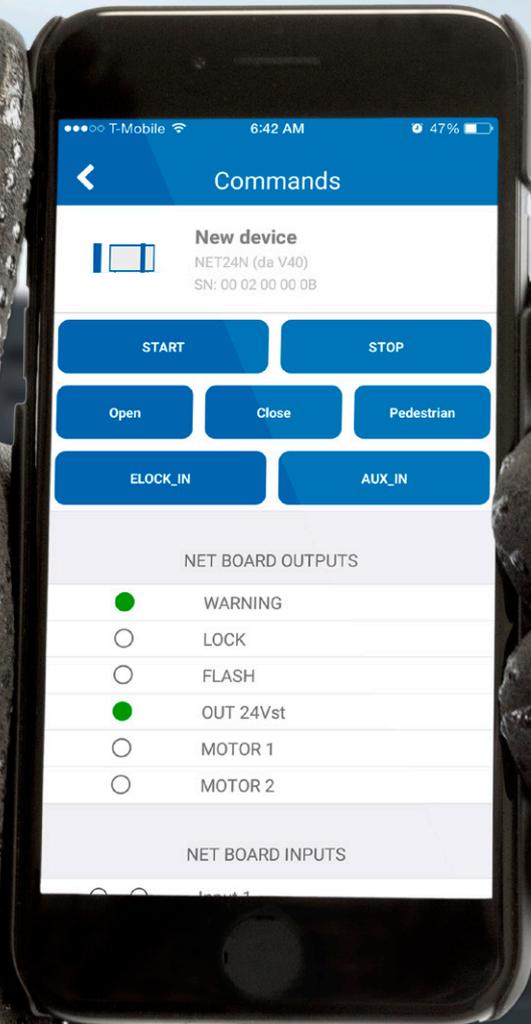

Create and manage your installations using a smartphone.

NETLINK lets you set parameters, connect remotes & save the installation's settings to use again.

Quick Start Guide

1

Register at cloud.deasystem.com to activate your service.

2

Download the DEA Installer app on your phone.

3

Install a NET-NODE onto the automation.



DEAcloud is the central service point and data storage for DEAINSTALLER.

It allows you to automatically backup data of installations in your account.

Registering two or more phones?

Then you need a Premium Account. Premium Cards have a private code used to upgrade your cloud account.

Cards are available from Downee (licence fee applies).

Premium Card

PREMIUM CARD allows your **DEAcloud** account to be upgraded to **PREMIUM** account for up to 10 smartphones.

These 10 devices can share installation data related to your account.

PREMIUM accounts are active for 12-months (from activation). After which another **PREMIUM CARD** is needed to renew.

To enable **INSTALLER PREMIUM** account:

1. Visit the website cloud.deasystem.com
2. Sign in to your **DEAcloud** account
3. Go to the menu **LICENSE**
4. Enter the code on the **PREMIUM CARD**



STANDARD

Single user

With a single user account you can:

1. Store parameters of any DEA installation
2. Save and manage parameters
3. Save and manage remotes



PREMIUM

For two to ten users

With a premium account you can:


1. Manage parameters
2. Save installation settings
3. Save and manage remotes
4. Share installation data between users

1

DEAinstaller app



2

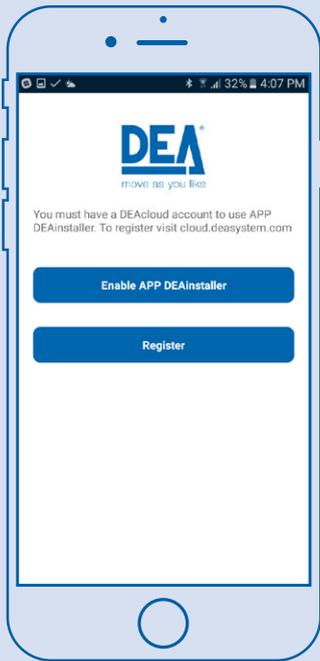

DEAinstaller app is for the professional installer.

Program and manage DEA installations using bluetooth technology.

The user-friendly interface allows you to quickly set parameters. Moreover, you will be able to access new functionalities by updating the firmware of your control boards.

When you backup your installations restoring parameters and remotes is simple.

DEAinstaller app is free to download.

Simple 2-step registration automatically connects the app to your cloud account.

The installer app lets you:

- Operate the gate
- Confirm operation of accessories installed
- Manage all parameters
- Add & remove remotes
- Share installation parameters between phones (Premium Acc.).

Smartphone minimum requirements:

Bluetooth 4.0 (smart - low energy)

Operative system: APPLE iOS 9 or Android 4.3

NET-NODE

Net-Node is the link between the control board and DEA Apps. It's plugged-in during programming to receive data from the App on your smartphone.

It can be permanently installed for use with the User App or removed and reused with every motor install.

Net-Node can be added to non-DEA automation (to operate with DEA App) when a compatible DEA receiver is also fitted.

Only used with compatible Netlink DEA control boards, Net-Node is available separately by Downee.



3

Questions? Talk to your Downee contact.

Downee

Tech Support

1800 241 733



DEAuser App



The new App for homeowners to control their DEA automation from a smartphone.





NET-NODE allows a homeowner to operate DEA automation using an app.

By connecting NET-NODE to a DE@NET control board or Netlink DEA receiver, you can control any automation.



By adding the automation's registration number many smartphones can connect to a NET-NODE, allowing multiple users to operate the gate.

The app can control other automation providing it has its own NET-NODE.

DEAuser app cannot access or alter any parameters.

How to use the app:

1. Download and open DEAuser app.
2. Connect to the automation you want to control:
 - A. Enter **Serial code**⁽²⁾ of the control board or receiver provided by the installer
 - B. Enter the **Pairing Code**⁽³⁾ (default = 0)
3. Confirm and wait for the paired device be found.
4. Give a name to the automation (eg. 'Front Gate')
5. Provide the **Pairing Code**⁽³⁾ to all users of the app.

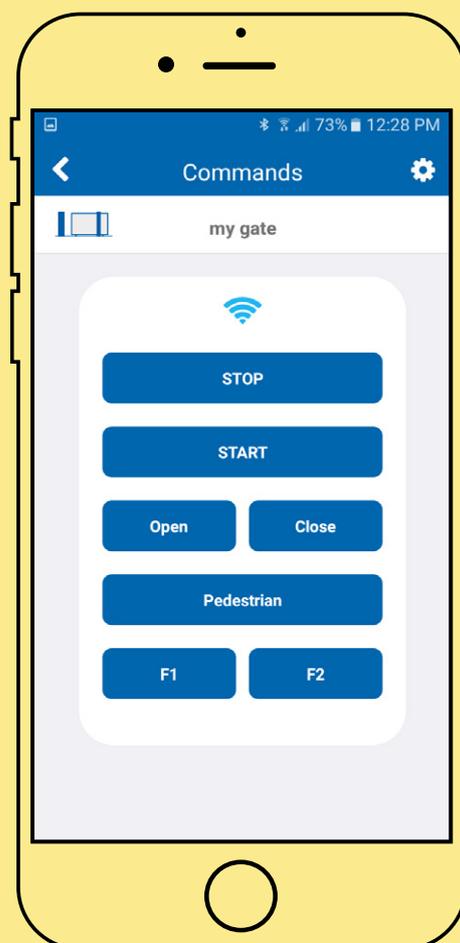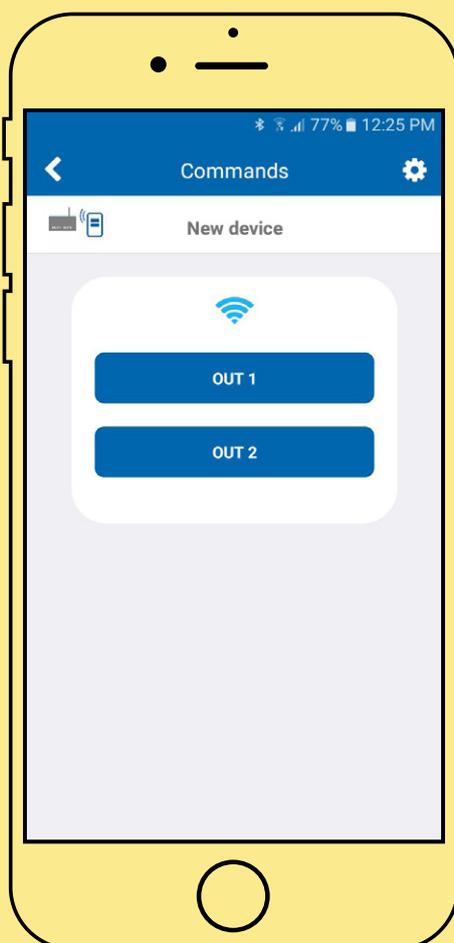

Note:

For safety reasons we recommend you access the settings panel of your App and customize **Pairing Code**⁽³⁾ and **User Code**⁽¹⁾ before sharing the **Pairing Code**⁽³⁾.

(1) **USER CODE**: This is the code for the main administrator of the automation. He is allowed to change the **PAIRING CODE** and the **USER CODE**.

(2) **SERIAL CODE**: 10-digit code printed on the DE@NET board or on the DEA receiver.

(3) **PAIRING CODE**: Code to connect to the App DEAuser to NET-NODE. Default = 0. To be changed with a code of your choice after completing the installation.