




INTERNAL CONTROL PANELS

230-400 Vac

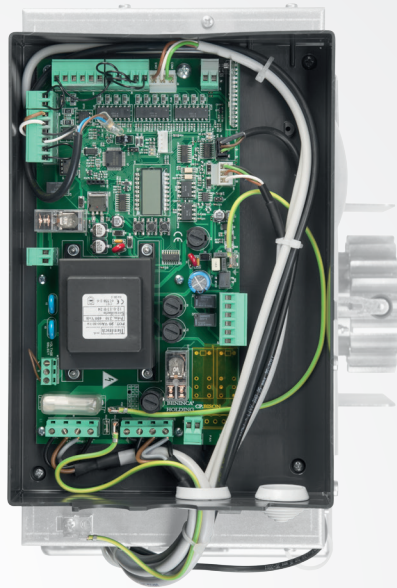

APPLICATION

1 actuator for sliding gate series BISON25 OTI, BISON35 OTI and BISON45 OTI

CONTROL PANEL POWER SUPPLY


230 Vac o 400 Vac

MOTORS POWER SUPPLY

220 Vac/750 W three phase with inverter
or 380 Vac/1500 W three phase with inverter

MAIN FUNCTIONS:

- Built-in LCD display
- Built-in 433.92 MHz 64 codes and 3 codes radio receiver (programmable code, rolling code and ARC)
- Removable terminal blocks
- Encoder input for obstruction detection
- Motor limit switch inputs
- Open, close and pedestrian inputs
- Inverter connection ready
- Output for gate open indicator light, second radio channel and test photocells and service light
- Electronic torque adjustment
- Open and close deceleration
- Electronic braking guarantees a precise stop, even with heavy doors
- Optional parameter configuration and remote control management using the Advantouch system
- Number of manoeuvres
- Programming access password
- Maintenance reminder

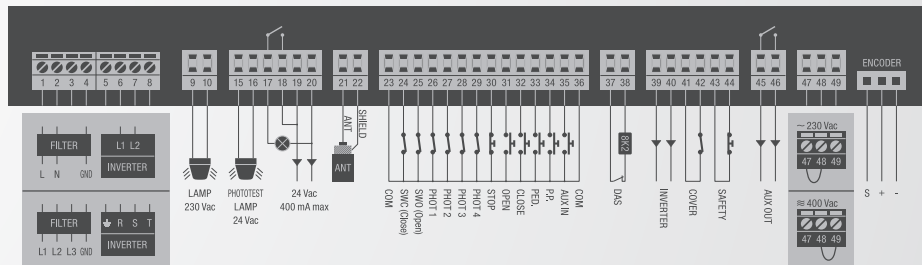

ACCESSORIES



DA.2S
9760100

Electronic card that allows synchronised movement of 2 automations (facing doors).



SC.RD
9760027

Board no. 4 relays for control unit inputs support/decoupling. For use in the event of very long connections (i.e. buttons in house).

